


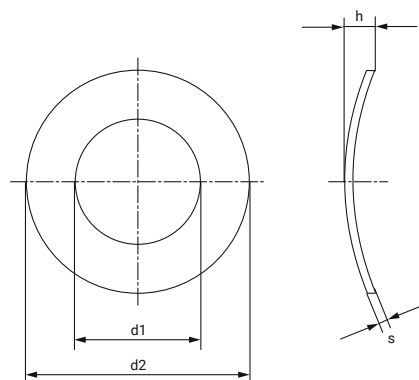

This washer is used in assemblies involving aluminium, plastic parts or insulating material etc. It is also recommended for locking assemblies where there is danger of damage to a painted or enameled surface.

In electronics applications this washer is used to immobilize electrical contacts. Moderate tightening torque should be used with this washer.

MATERIAL: Spring steel
C60S (C60)
EN 10132 (DIN 17222)
FINISH: Anti-rust oil-dipped
HARDNESS: According to diameter:
HV 510 ÷ 526 // HRC 49 ÷ 50

Ø Application mm	Part Number	d1	d2	h Min.	h Max.	S	Box Quantity	Outer Box Quantity
2,0	01080010	2,2 +0,250 -0	4,5 ± 0,375	0,50	1,0	0,3 ± 0,030	1.000	64.000
2,3	01080028	2,5 +0,250 -0	5,0 ± 0,375	0,50	1,0	0,3 ± 0,030	7.000	112.000
2,5	01080036	2,8 +0,250 -0	5,5 ± 0,375	0,55	1,1	0,3 ± 0,030	1.000	64.000
3,0	01080044	3,2 +0,300 -0	6,0 ± 0,375	0,65	1,3	0,4 ± 0,050	5.000	320.000
3,5	01080052	3,7 +0,300 -0	7,0 ± 0,450	0,70	1,4	0,4 ± 0,050	1.000	64.000
4,0	01080060	4,3 +0,300 -0	8,0 ± 0,450	0,80	1,6	0,5 ± 0,050	3.000	48.000
5,0	01080079	5,3 +0,300 -0	10,0 ± 0,450	0,90	1,8	0,5 ± 0,050	2.000	32.000
6,0	01080087	6,4 +0,360 -0	11,0 ± 0,550	1,10	2,2	0,5 ± 0,050	1.250	80.000
7,0	01080095	7,4 +0,360 -0	12,0 ± 0,550	1,20	2,4	0,5 ± 0,050	2.500	20.000
8,0	01080108	8,4 +0,360 -0	15,0 ± 0,550	1,70	3,4	0,5 ± 0,060	1.250	20.000
10,0	01080116	10,5 +0,430 -0	18,0 ± 0,550	2,00	4,0	0,8 ± 0,060	1.000	8.000