


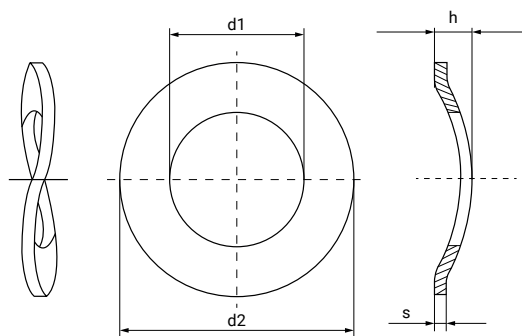

This washer is used in assemblies involving aluminium, plastic parts or insulating material etc. It is also recommended for locking assemblies where there is danger of damage to a painted or enameled surface. In electronics applications this washer is used to immobilize electrical contacts. This washer can be used with bolts requiring high tightening torque.

MATERIAL: Spring steel
C60S (C60)
EN 10132 (DIN 17222)
FINISH: Anti-rust oil-dipped
HARDNESS: According to diameter:
HV 495 ÷ 510 // HRC 48 ÷ 49

Ø Application mm	Part Number	d1	d2	h Min.	h Max.	S	Box Quantity	Outer Box Quantity
3,0	01081311	3,2 +0,300 -0	8 ± 0,450	0,8	1,6	0,5 ± 0,050	1.000	64.000
3,5	01081338	3,7 +0,300 -0	8 ± 0,450	0,9	1,8	0,5 ± 0,050	2.000	128.000
4,0	01081012	4,3 +0,300 -0	9 ± 0,450	1,0	2,0	0,5 ± 0,050	2.000	128.000
5,0	01081020	5,3 +0,300 -0	11 ± 0,550	1,1	2,2	0,5 ± 0,050	1.500	24.000
6,0	01081039	6,4 +0,360 -0	12 ± 0,550	1,3	2,6	0,8 ± 0,050	1.000	16.000
7,0	01081047	7,4 +0,360 -0	14 ± 0,550	1,5	3,0	0,8 ± 0,060	1.500	24.000
8,0	01081055	8,4 +0,360 -0	15 ± 0,550	1,5	3,0	0,8 ± 0,060	1.250	20.000
10,0	01081063	10,5 +0,430 -0	18 ± 0,550	2,1	4,2	1,0 ± 0,070	1.000	8.000
12,0	01081071	13,0 +0,430 -0	24 ± 0,650	2,5	5,0	1,2 ± 0,070	750	6.000
14,0	01081080	15,0 +0,430 -0	28 ± 0,650	3,0	6,0	1,6 ± 0,080	350	2.800
16,0	01081098	17,0 +0,430 -0	30 ± 0,650	3,2	6,4	1,6 ± 0,080	300	2.400
18,0	01081100	19,0 +0,520 -0	34 ± 0,800	3,3	6,6	1,6 ± 0,080	250	2.000
20,0	01081119	21,0 +0,520 -0	36 ± 0,800	3,7	7,4	1,6 ± 0,080	200	2.000
22,0	01081127	23,0 +0,520 -0	40 ± 0,800	3,9	7,8	1,8 ± 0,100	150	2.000